

FEATURES AND CHARACTERISTICS

- Electronic module in association with a contactor to provide Remote Controlled Circuit Breaker operation.
- Designed for direct mounting on bus bar contactors.
- Provide an I²t trip law, with accelerated trip time at currents higher than 10 In.
- No voltage drop in protected line.
- Trip status provided by an external low power circuit breaker, or by internal latching device.
- Weight: 80 grams ± 5%.
- Standard nominal current: 50, 100, 200, 300 Amps.
- Temperature range: -50°C To +85°C
- Custom units available.

GENERAL ELECTRICAL SPECIFICATIONS

Supply voltage according to MIL Std 704	16 to 32 Vdc
Current supply at 28 Vdc	35 mA max + contactor coil supply
Cold weather supply voltage operation	10.5 Vdc
Low voltage protection by immediate trip	< 9 V ± 10%
Output current	1 amp permanent 6 Amps inrush (30ms)
Dielectric strength (All secondary terminal to ground)	1000 Vdc
Insulation resistance (All secondary terminal to ground)	100 MΩ at 50 Vdc



Featuring **LEACH**® power and control solutions
www.esterline.com

AMERICAS
6900 Orangethorpe Ave.
P.O. Box 5032
Buena Park, CA 90622

Tel: (01) 714-736-7599
Fax: (01) 714-670-1145

EUROPE
2 Rue Goethe
57430 Sarralbe
France

Tel: (33) 3 87 97 31 01
Fax: (33) 3 87 97 96 86

ASIA
Units 602-603 6/F Lakeside 1
No.8 Science Park West Avenue
Phase Two, Hong Kong Science Park
Pak Shek Kok, Tai Po, N.T.
Hong Kong
Tel: (852) 2 191 3830
Fax: (852) 2 389 5803


Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

ENVIRONMENTAL CONDITIONS


SERIES CSHP

Vibrations - Sinusoidal per MIL Std 202 Method 204 : 20-2000 Hz - Random 10-2000 Hz	10 G 0.15 g ² /Hz
Shock: Structure per MIL Std 202 method 213	30 G
Salt Spray: per MIL Std 202 method 101	96 H
Humidity: per MIL Std 202 method 106 - HR 95%	240H
Altitude	45000 ft max.
Voltage spikes: DO160 section 17 category A	
Audio frequency conducted susceptibility: DO160 section 18 category Z	
Induced signals: DO160 section 19 category Z	
Radio frequency: DO160 section 20 category W	
Lightning: DO160 section 22 category B2F2. (B4F4 with additional)	


TRIP CHARACTERISTICS

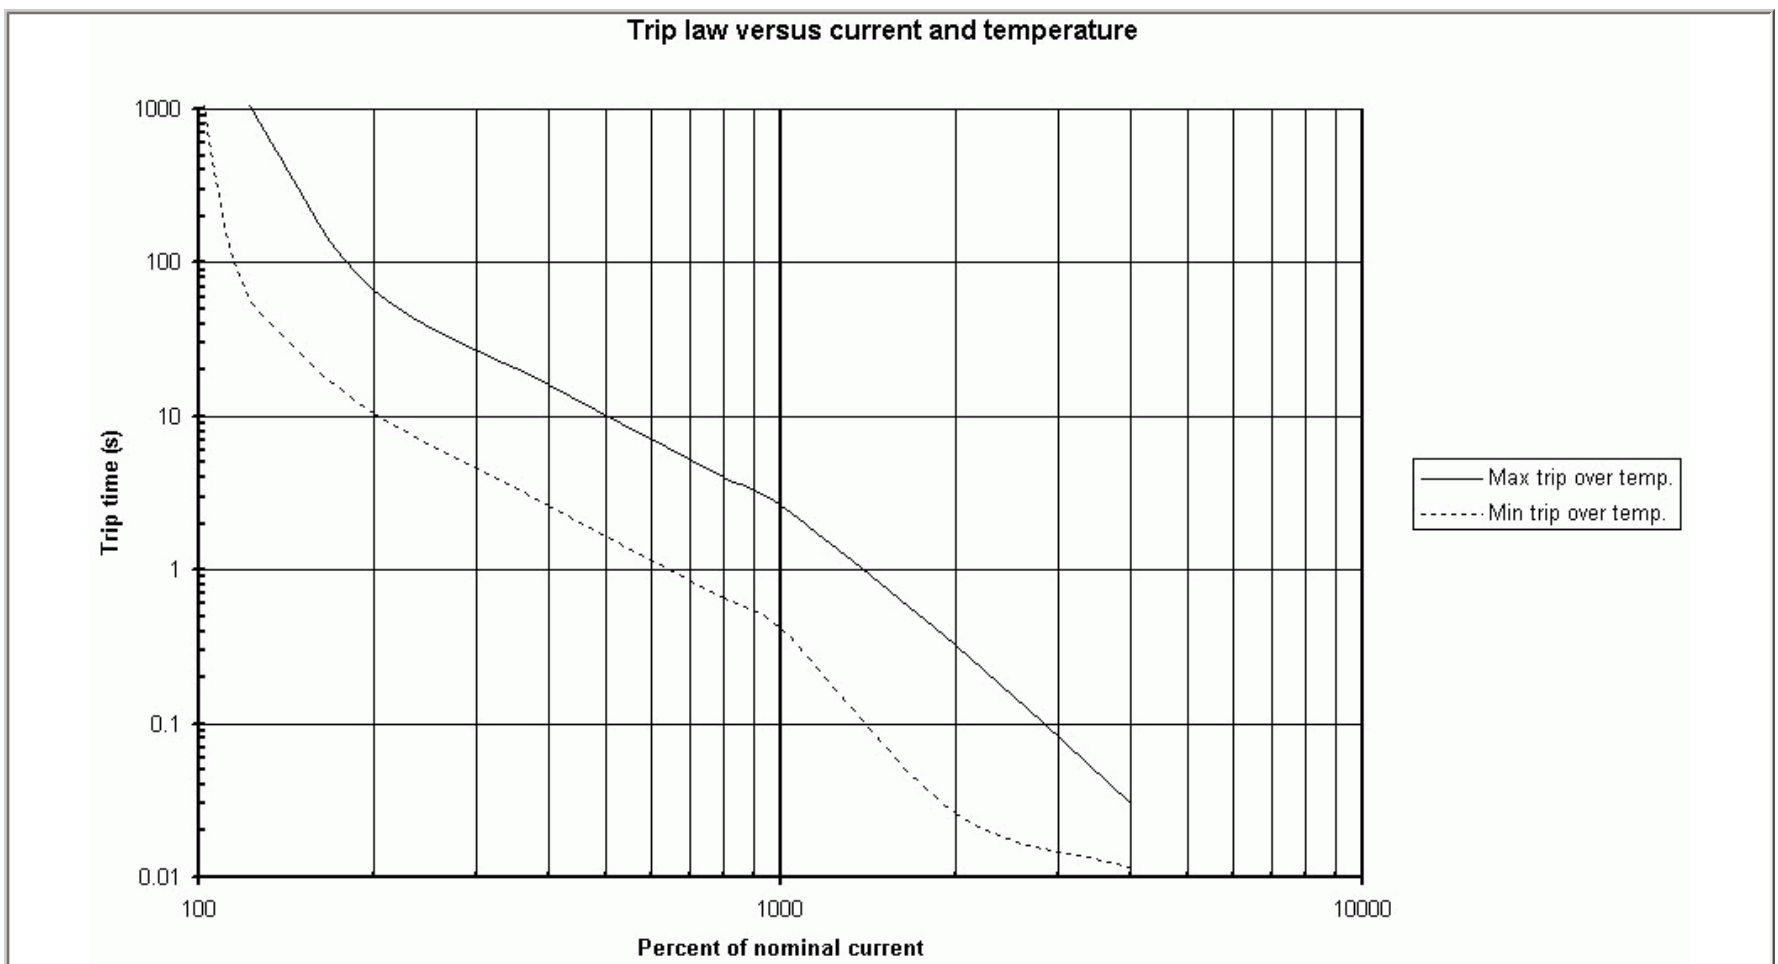

MOUNTING

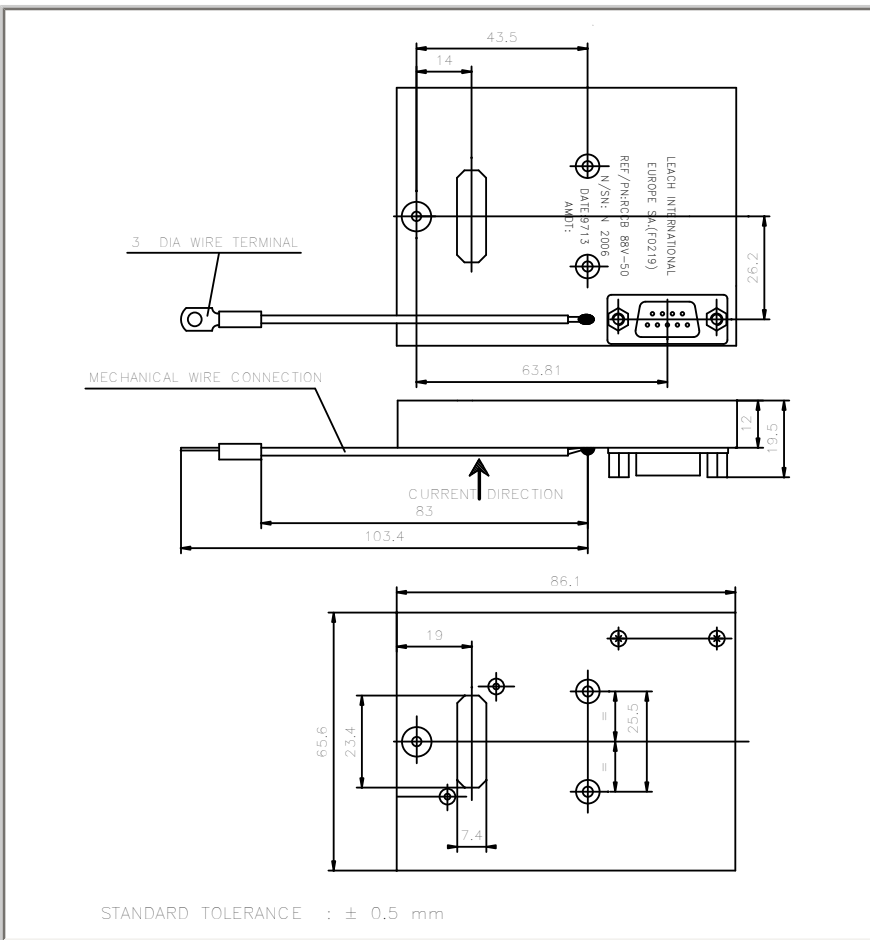

SCHEMATIC AND WIRING DIAGRAM

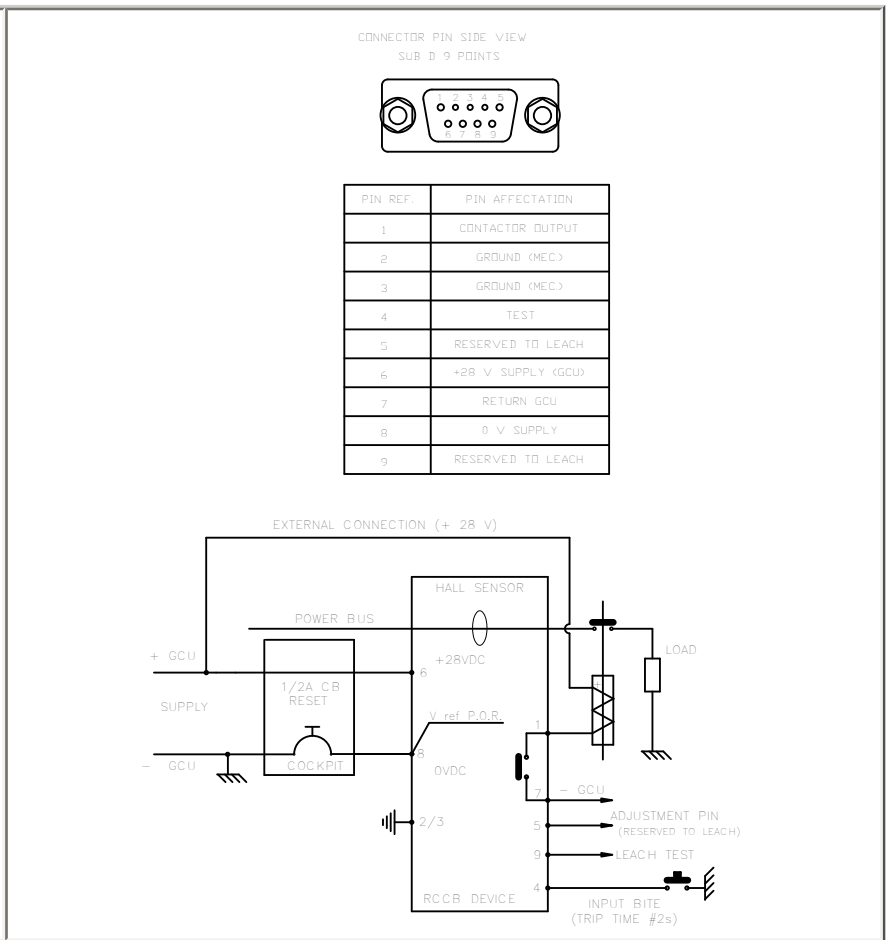

NUMBERING SYSTEM

CSHP XXX

|-----Nominal current in Amps (existing standard 50 and 75)

-----Basic family current sensor for protection